


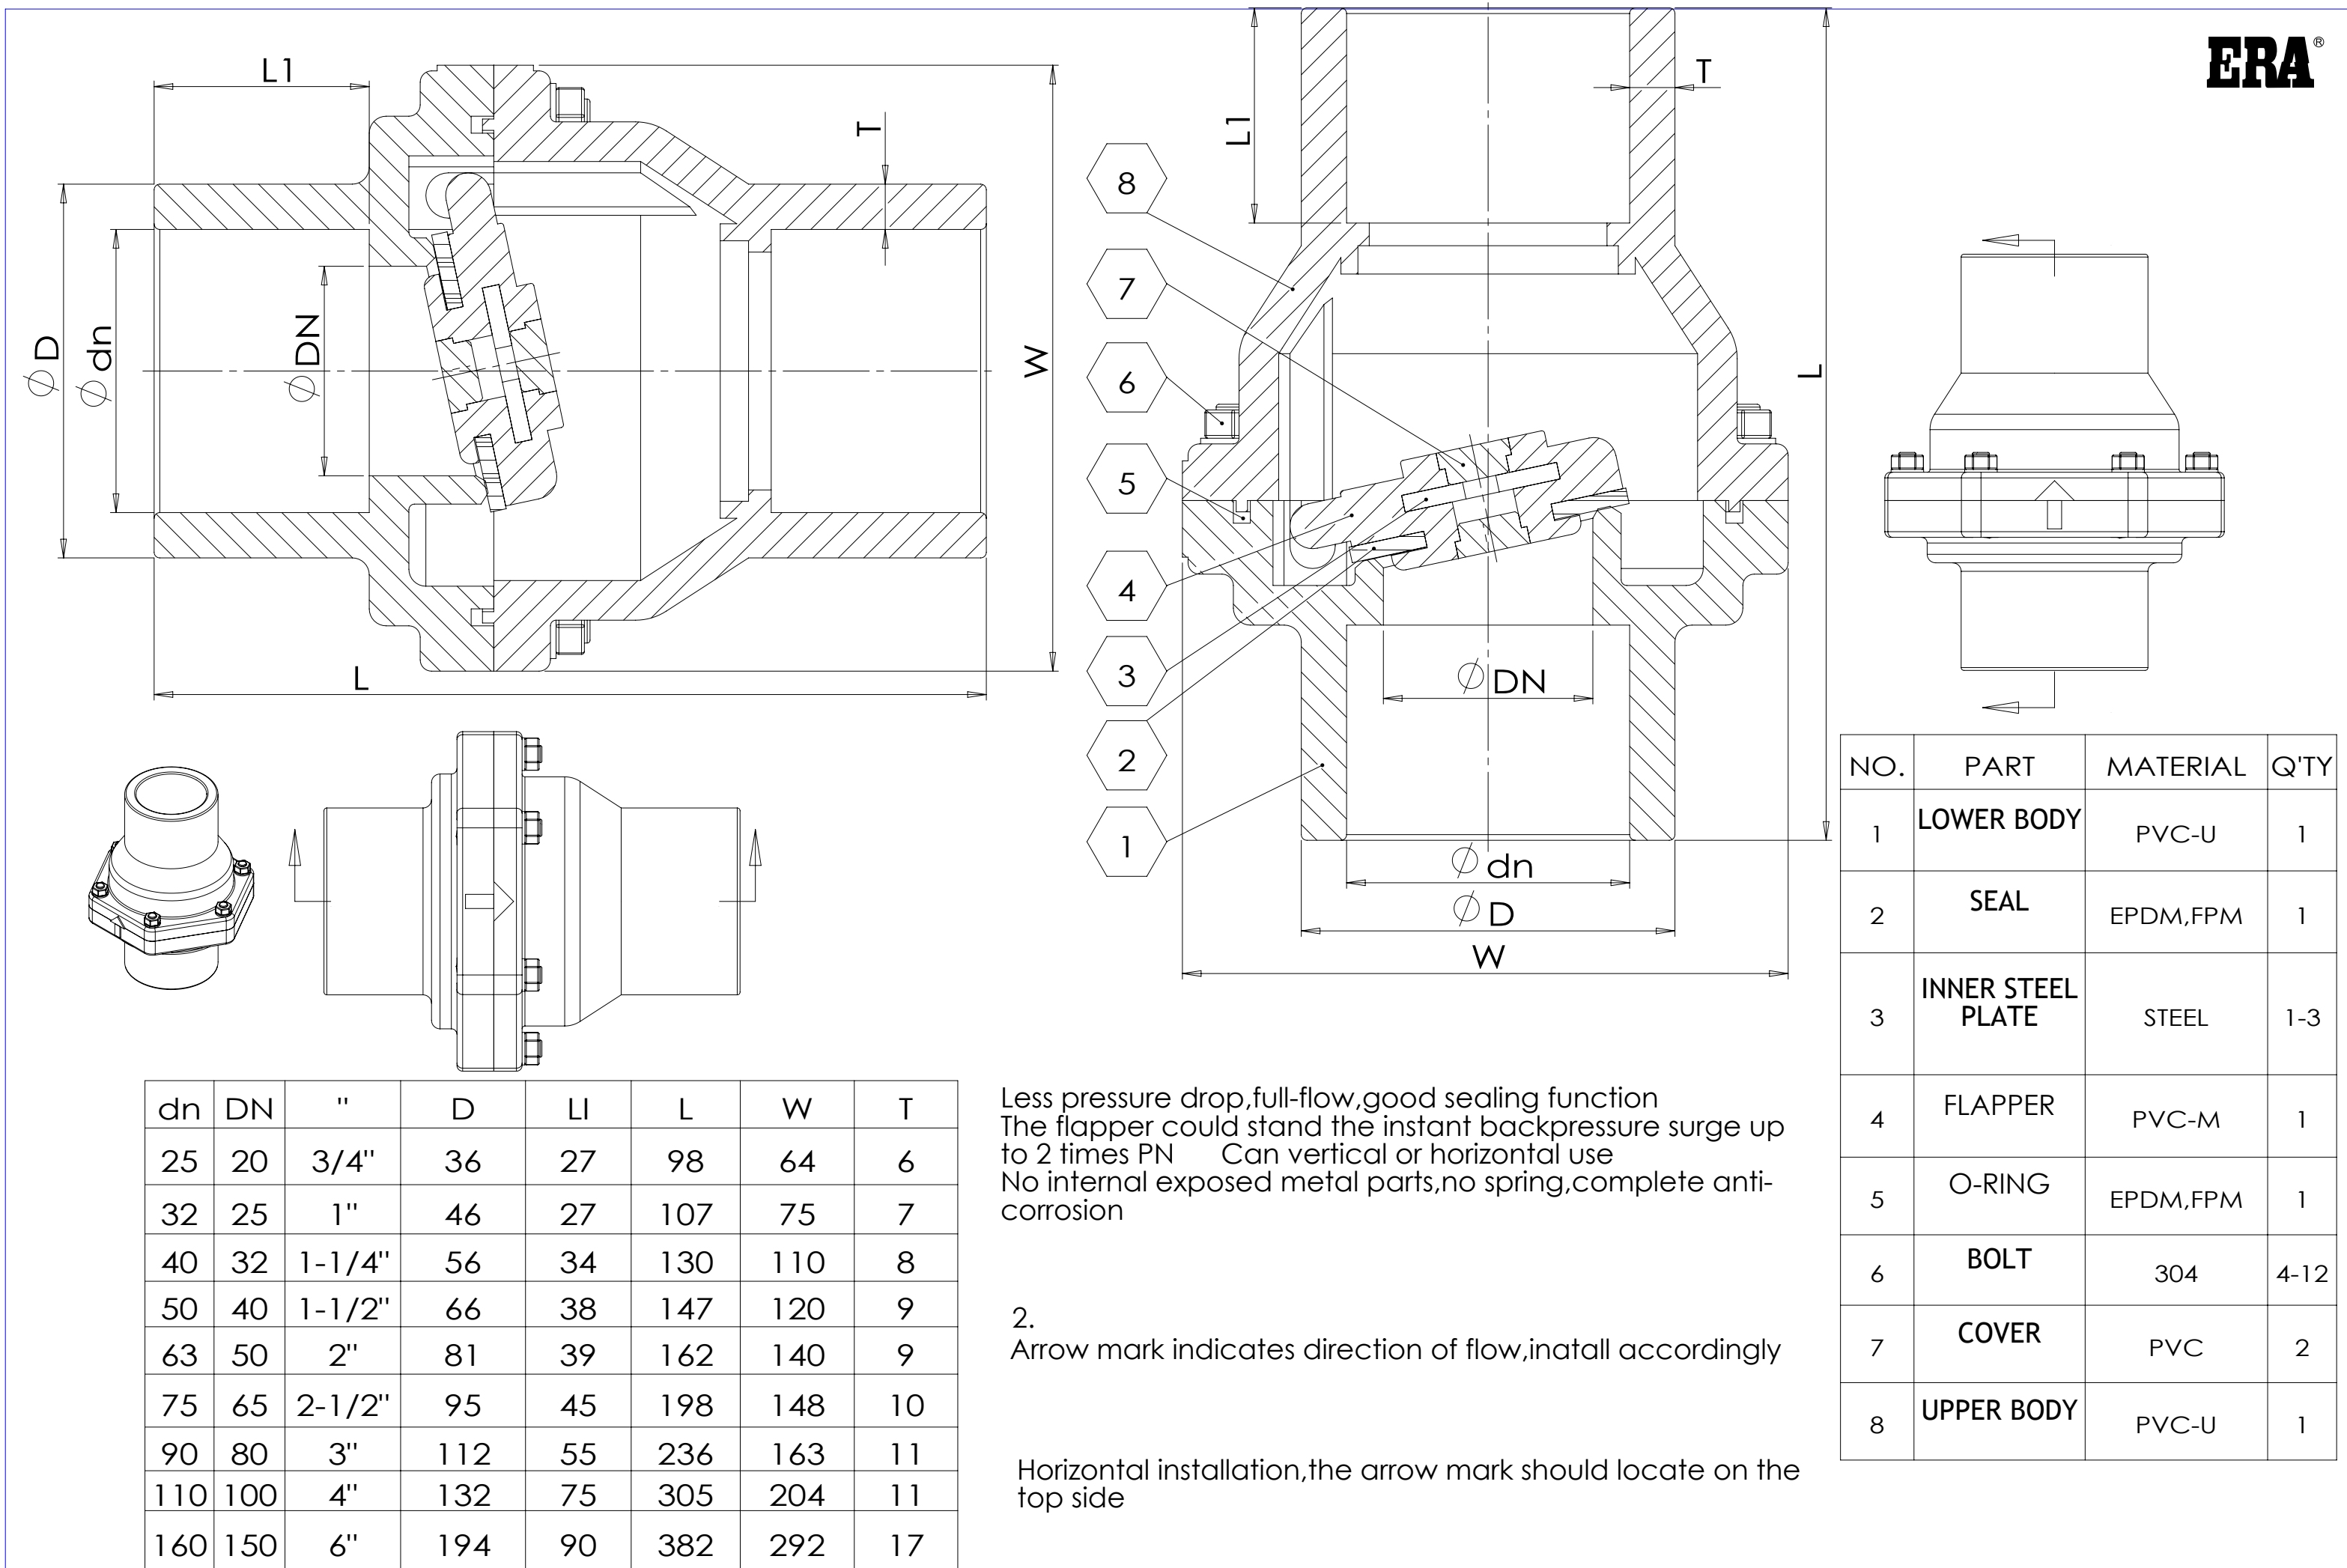

dn	DN	"	D	LI	L	W	T
25	20	3/4"	36	27	98	64	6
32	25	1"	46	27	107	75	7
40	32	1-1/4"	56	34	130	110	8
50	40	1-1/2"	66	38	147	120	9
63	50	2"	81	39	162	140	9
75	65	2-1/2"	95	45	198	148	10
90	80	3"	112	55	236	163	11
110	100	4"	132	75	305	204	11
160	150	6"	194	90	382	292	17

Less pressure drop,full-flow,good sealing function
The flapper could stand the instant backpressure surge up to 2 times PN Can vertical or horizontal use
No internal exposed metal parts,no spring,complete anti-corrosion

2.
Arrow mark indicates direction of flow,inatall accordingly

Horizontal installation,the arrow mark should locate on the top side